

Datasheet

Hatch Cover Tape

T-ISS

Revision 2020


Product description

T-ISS Haco tape has been working for prohibiting hatch covers from leakage that could be a leading reason to damage transported products.

The excellent quality tape is ready to encounter tough environment with nice resistance from seawater or weather.

Our Haco tape keeps out moisture, water, noise, smoke or other possible harmful stuffs by tightly sealing a hatch cover.

Pictures

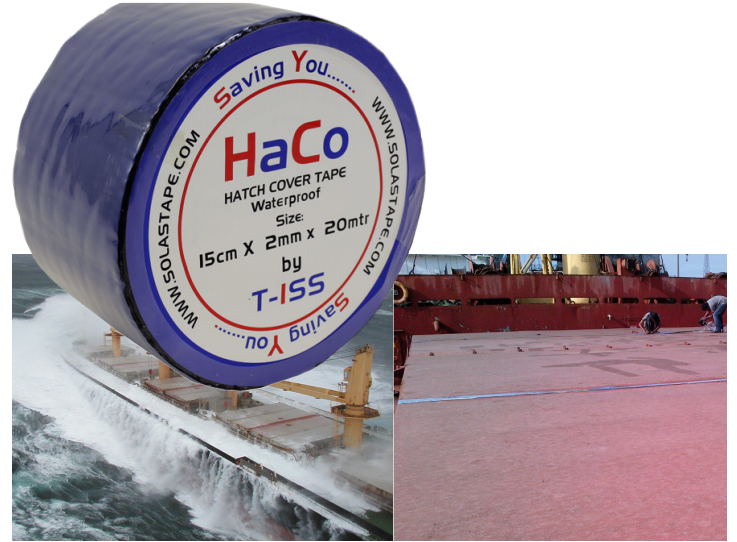

Dimensions

Our HaCo Tape, is available in rolls in the following sizes:

| Width | Length | Thickness | Weight |
|--------|--------|-----------|--------|
| 100 mm | 20 mtr | 2 mm | 14 kg |
| 150 mm | 20 mtr | 2 mm | 14 kg |

other possible sizes on request

ISSA IMPA

43.003.02 232452(100 mm x 20 mtr)

43.003.03 232453(150 mm x 20 mtr)

HS Code: 6807.1000

Certificates & Standards

- Green Passport

Applications & Use

1. Being the surface free from dirt & salt on which would be applied.
2. The surface must stay dry, before applying the tape.
3. Under cold weather, the tape should be warmed up with a torch for the best adhesive performance. The flame should be applied to the black surface after removing the release liner. Always be careful not to use a torch in fire danger areas.
4. Immediately after heating apply pressure to stick the tape onto the surface before the tape cools. This will ensure the best condition for adhesion.

Specifications

- Characteristics: 20 meters of self-adhesive SBS bitume rubber compound coated to a modified blue HDPE liner and release PE Liner.
- Temperature resistance: Between -15 to +70 C. (Installation should be under from +5 C to +40 C)
- Shelf life: 24 months properly stored.